



## **SpecterOS4x** 4x OPTICAL SIGHT

The SpecterOS4x Optical Sight is an optically brilliant instrument for precision aiming of service rifles and carbines. With superior low light performance and extremely long eye relief, the SpecterOS4x outperforms competing 4x optical sights and, as a result, has been selected for general service by advanced military forces.

Depending upon the situation, the user may light the central part of the reticle with brilliant LED illumination for CQB applications, or select lower-level illumination of the entire reticle for low-light operations. Because the reticle is etched in glass, it is plainly visible even in the case of loss of electrical power due to battery failure or EMP.



The SpecterOS4x is an extremely rugged tool designed to withstand the rigors of modern professional use.



## SpecterOS4x

Models: SFOV4-A1 • SFOV4-C1

### Specifications

Magnification	4x
Length	153mm nominal
Width	67mm nominal
Height	65 mm nominal
Weight	515g nominal with battery

Reticle	SFOV4-A1: ballistic crosshair with CQB chevron
	SFOV4-C1: ballistic crosshair with CQB central cross and VSOR Rangefinder

Ballistic correction	SFOV4-A1: CX5755 reticle: 100-800m for 5.56 NATO
	SFOV4-C1: CX5855 reticle: 100-800m for 5.56 NATO

Field of View	6.5 degrees
---------------	-------------

Illumination source	Battery-powered LED
---------------------	---------------------

CQB illumination	5 settings (AN/PVS-22 night vision compatible)
------------------	--

Whole reticle illumination	5 settings (AN/PVS-22 night vision compatible)
----------------------------	--

Eye Relief	70 mm
------------	-------

Entrance pupil	32mm
----------------	------

Exit pupil	7.8mm
------------	-------

Fixed focus range	20m to infinity
-------------------	-----------------

Battery type	DL 1/3N (3v Lithium)
--------------	----------------------

Battery life	600 hours minimum, 3000 hours average
--------------	---------------------------------------

Exterior finish	Hard-anodized aluminum, gray/black color
-----------------	--

Adjustment resolution	0.5 minute of angle
-----------------------	---------------------

Adjustment range	120 minutes of angle
------------------	----------------------

Base requirement	Mil-Std-1913 'Picatinny Rail' (Weaver compatible)
------------------	---


Attachment	ARMS Levers
------------	-------------

Environmental	
---------------	--

Waterproof:	66 ft for 2 hours
-------------	-------------------

Shockproof:	450 g's
-------------	---------

Available accessories	ARD (Anti-Reflection Device), Lens covers MRD mount
-----------------------	--

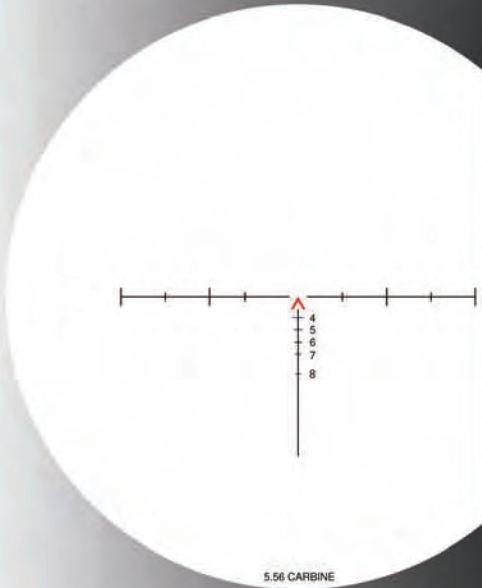

SFOV4-A1 chevron reticle with CQB illumination



SFOV4-C1 reticle with CQB illumination