


Professional Marksman Series
RIFLE TELESCOPE
5-25x56mm Model TT525P

Tangent Theta 5-25x56mm model TT525P Rifle Telescope is an extreme-range precision sighting instrument for professional marksmen. Designed for heavy field use, Tangent Theta's industry-leading development team has used their extensive experience to optimize and refine it for unfailing ruggedness, mechanical precision and unsurpassed image quality. Elevation and windage mechanisms exhibit precise tactile response and feature a truly tool-less re-zero procedure.

Tangent Theta rifle telescopes are built in Canada and are specifically designed and function-tested for long lifecycles in the harshest of environmental conditions.

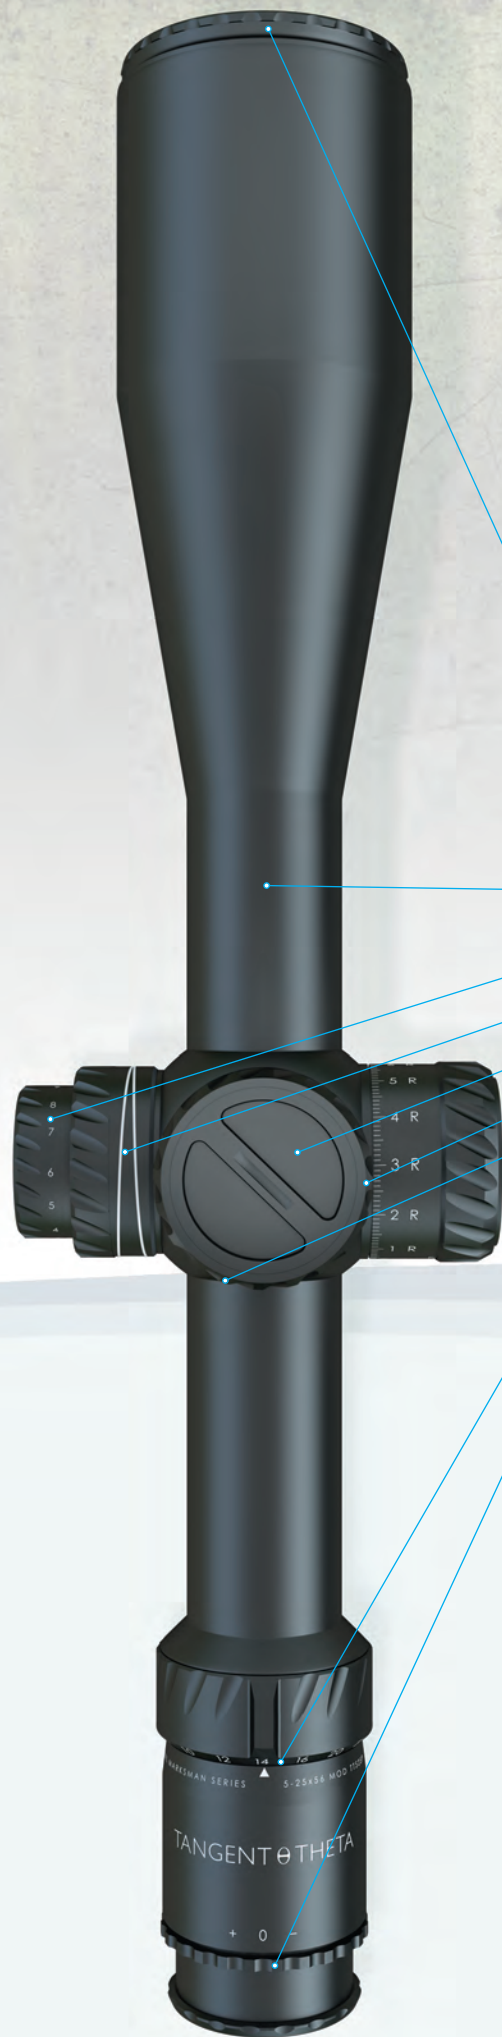

- 56mm objective lens
- 34mm main tube
- eleven reticle illumination settings
- side parallax adjustment
- tool-less re-zero feature (patent pending)
- non-translating knobs with elevation zero-stop
- double-turn elevation with rev indicator
- 5-25x magnification range
- lockable rapid adjusting diopter



Professional Marksman Series
RIFLE TELESCOPE
5-25x56mm Model TT525P





Professional Marksman Series
RIFLE TELESCOPE
5-25x56mm Model TT525P

SPECIFICATIONS*

Magnification	_____	5x-25x
Length	_____	425mm
Width	_____	103mm
Height	_____	86mm
Weight	_____	1150g
Tube diameter	_____	34mm
Objective bell diameter	_____	65mm
Objective lens diameter	_____	50mm nominal
Eyepiece diameter	_____	45mm
Reticle options	_____	Gen 2XR, MoA
Field of View @ 5x	_____	4.3 degrees (7.6m @ 100m)
Field of View @ 25x	_____	0.9 degrees (1.6m @ 100m)
Diopter range	_____	-3 to +2.5
Eye relief	_____	90mm
Exit pupil @ 5x	_____	11mm
Exit pupil @ 25x	_____	2.3mm
Re-zero mechanism	_____	tool-less re-zero (patent pending)
Total Adjustment Range		
Elevation	_____	30 mrad (103 MoA)
Windage	_____	+/- 10 mrad (+/- 34 MoA)
Working Adjustment Range		
Elevation	_____	28 mrad (96 MoA)
Windage	_____	+/- 6 mrad (+/- 20 MoA)
Adjustment resolution	_____	0.1 mrad or 1/4 MoA
Parallax adjustment range	_____	50m to infinity
Crosshair illumination	_____	LED, 11 settings
Battery type	_____	DL2032 3v lithium
Exterior finish	_____	Type II Anodized, matte
Environmental		
Waterproof:	_____	4 hours @ 10 meters
Shockproof:	_____	700g's @ 10,000 cycles
Standard accessories	_____	Tenebraex® lens covers & ARD



TANGENT THETA
5-25x56mm Model TT525P

master distribution by:
**Armament
Technology**
INCORPORATED
www.armament.com
sales@armament.com

* Subject to change. Consult www.tangenttheta.com for current specifications.